

Zinc Alloy

60 KG

180°



Satin Chrome  
26D



Satin Brass  
US4



Flat Black  
C19

### Finishes Available :

Maximum Weight 60kg / pair

Minimum Door Thickness : 38mm

068-GE55-26D

068-GE55-C19

Qty: 2 Pcs

**Adwork**  
RESEARCH AND  
MANUFACTURER  
OF 3D HINGES

**Stocking Distributor  
in Canada**





### GE55 Specification




zinc alloy  
锌合金

60 KG


180°

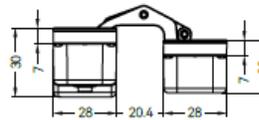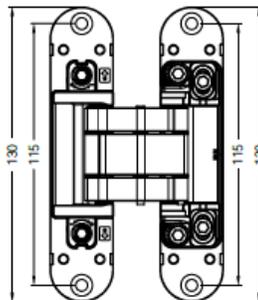


### REGULATING FUNCTION 调节功能

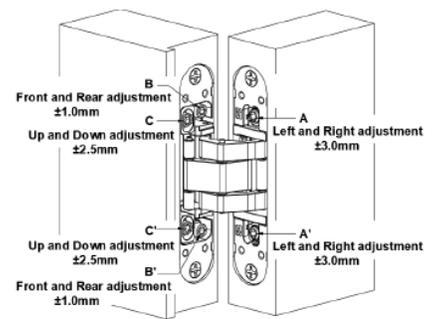

### INSTALLATION DIAGRAM 开孔安装示意图

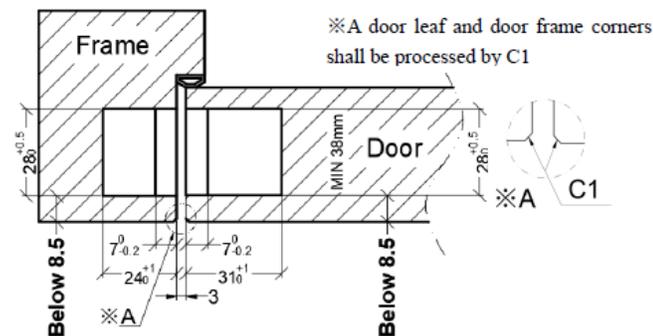

### OPENING DIAGRAM 开孔图

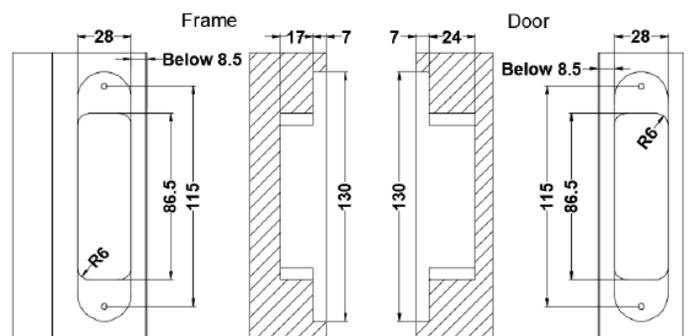





# Installation instructions


**i**

## 3D Adjustable Hidden Hinge

**Material: Zinc alloy**

### GE55

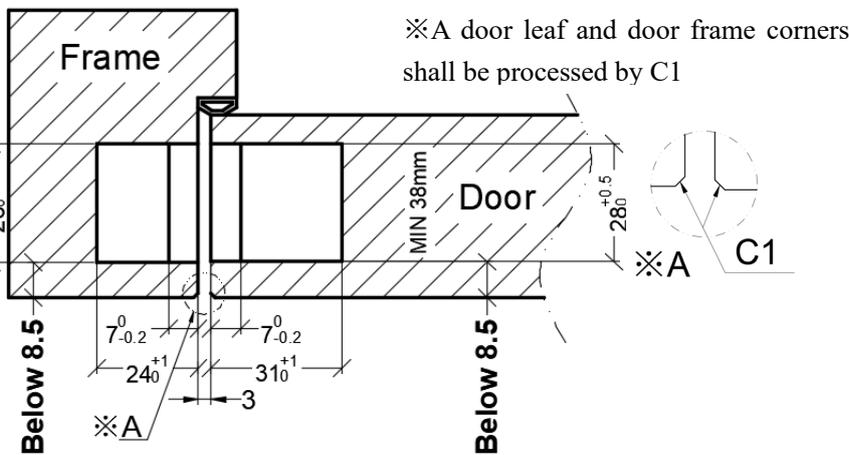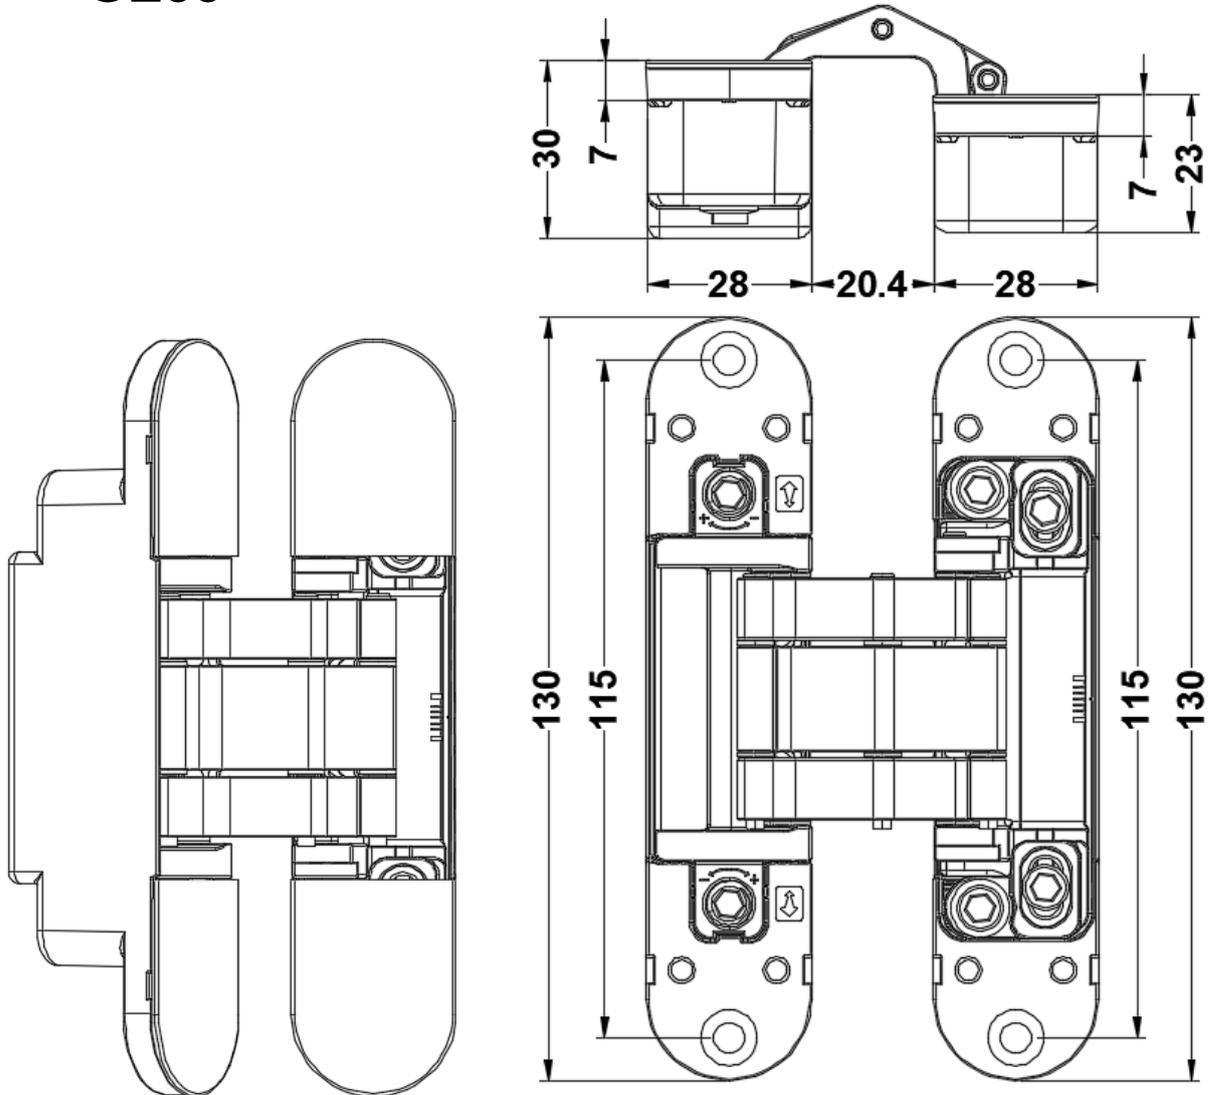

 <b>Maximum Weight</b> <b>60KG</b>	 <b>3D</b>




**Packing case includes: 2 hinges, 8  $\varnothing$  5x25mm wooden screws, 1 installation manual**



# Installation instructions


1

Slot the door leaf and frame as shown in the image below.

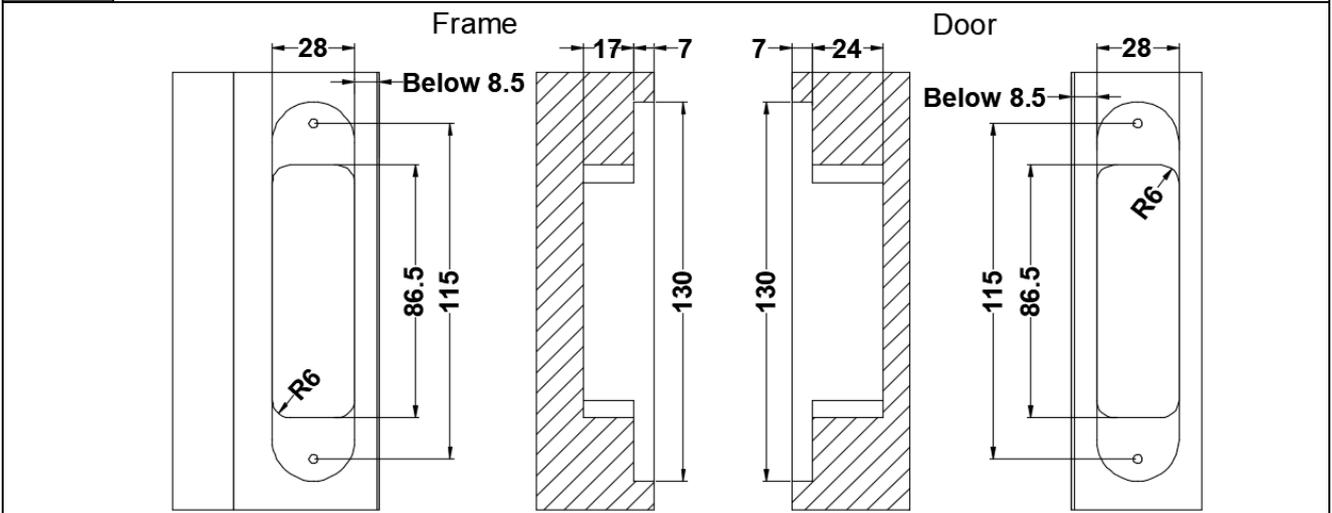

2

1. As figure①shown install the side marked “Door” in the hole of the door leaf, Use a Phillips screwdriver to place the product into the inside door leaf;
2. As figure②shown install the corresponding position of the door leaf with the product in the door frame with a hole, and tightened with Phillips screwdriver.
3. After the installation and commissioning, ensure the hinge is firm and stable, the hinge surface should be flush with the side of the door leaf and frame.

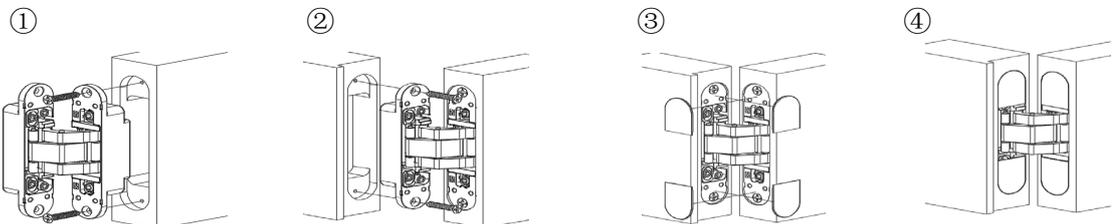

4. Repeatedly operate the door leaf to open and close many times, check that everything is in order for the customer to use.
5. Pay attention the hinge daily maintenance, keep it clean, meanwhile can be applied with the small amount of grease (oil).

3

## Installation and adjustment function:

**Left and right adjustment:** Use Allen key to match A/A'. Clockwise adjust will increase the door gap, counterclockwise adjust will decrease the door. (Note: adjustment must be Synchronized!)

**Front and rear adjustment:** Loosen the B/B' screw counterclockwise to adjust it and then drop lock.

**Up and down adjustment:** Loosen the C/C' Screw counterclockwise to adjust it and then drop lock.

