

Zinc Alloy

80 KG



Satin Chrome  
26D



Satin Brass  
US4



Flat Black  
C19

### Finishes Available :

068-GE75-26D

068-GE75-C19

Maximum Weight 80kg / Pair  
Minimum Door Thickness: 40mm

**Adwork**  
RESEARCH AND  
MANUFACTURER  
OF 3D HINGES

Qty : 2 Pcs

Stocking Distributor  
in Canada



### GE75 Specification



zinc alloy  
锌合金



80 KG




Chromium Plating  
珍珠铬




Electrophoresis Black  
电泳黑

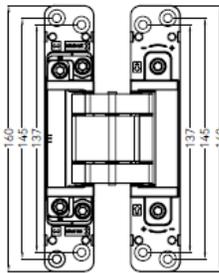


### REGULATING FUNCTION 调节功能

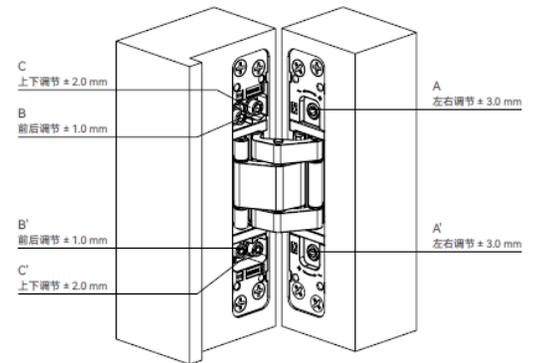


### INSTALLATION DIAGRAM 开孔安装示意图

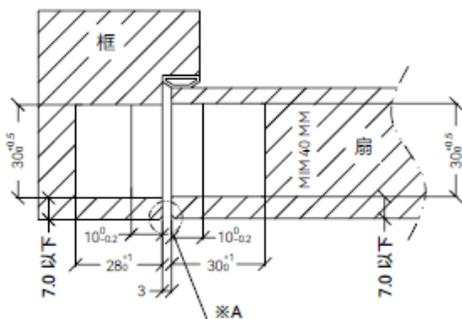

※A 处门扇及门框边角  
须做 C1 加工



### OPENING DIAGRAM 开孔图

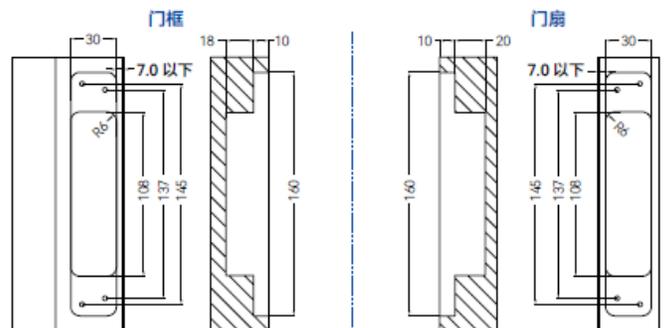






# Installation instructions

i


## 3D Adjustable Hidden Hinge

Material: Zinc alloy


### GE75

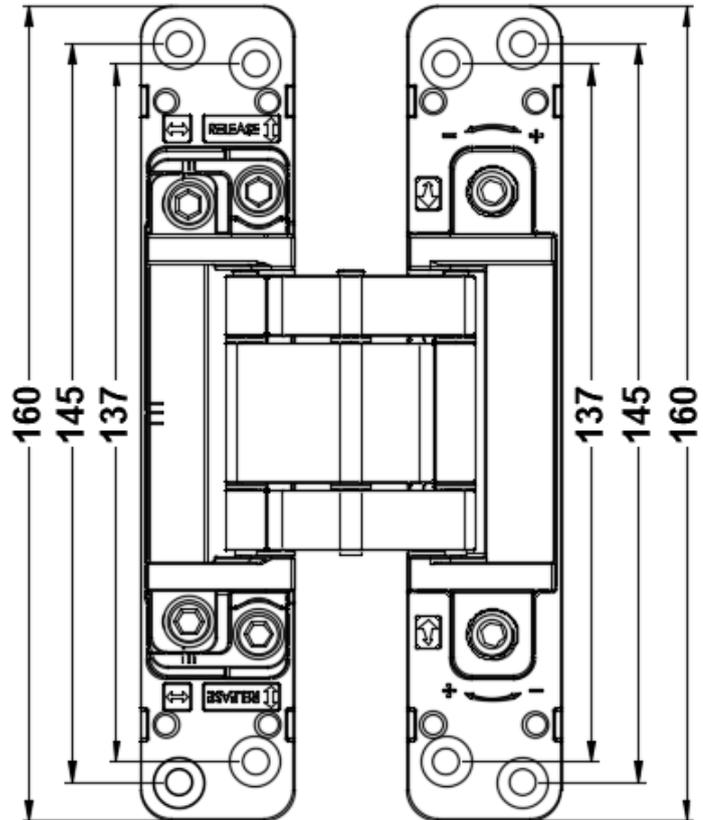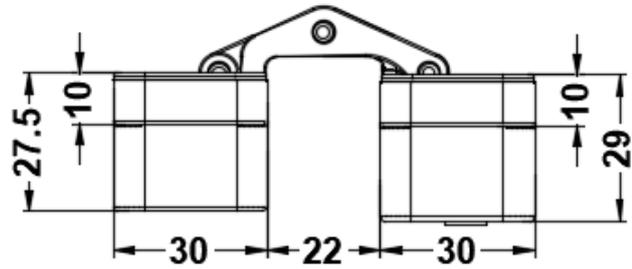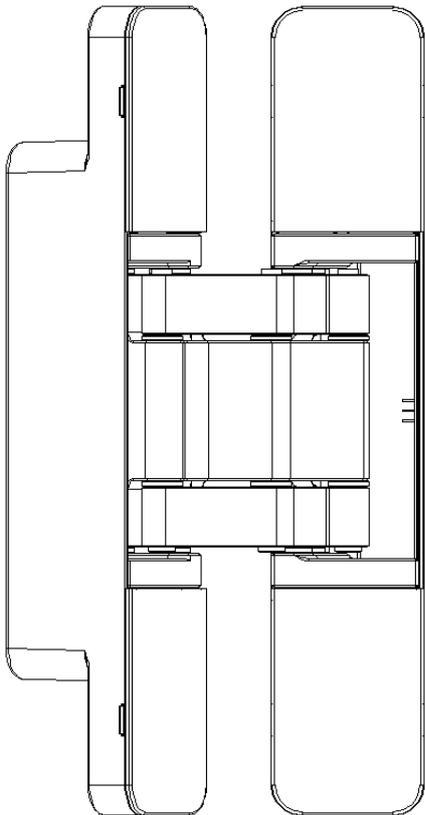

※A door leaf and door frame corners shall be processed by C1



Maximum Weight 80KG



Left and right adjustment:  $\pm 3.0\text{mm}$   
Up and down adjustment:  $\pm 2.0\text{mm}$   
Front and rear adjustment:  $\pm 1.0\text{mm}$




Packing case includes: 2 hinges, 16  $\varnothing 5 \times 40\text{mm}$  wooden screws, 1 installation manual



# Installation instructions


1

Slot the door leaf and frame as shown in the image below.

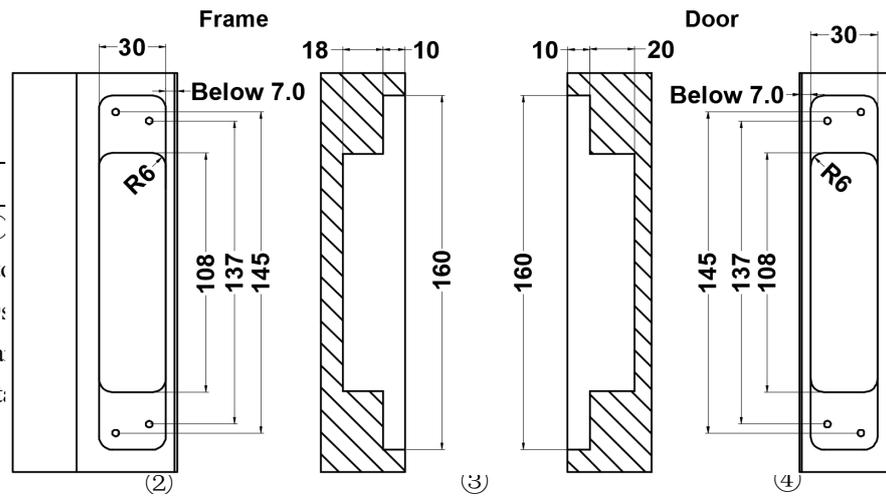

2

1. As figure ① screwdriver to
2. As figure ②: with a hole, a
3. After the inst: be flush with

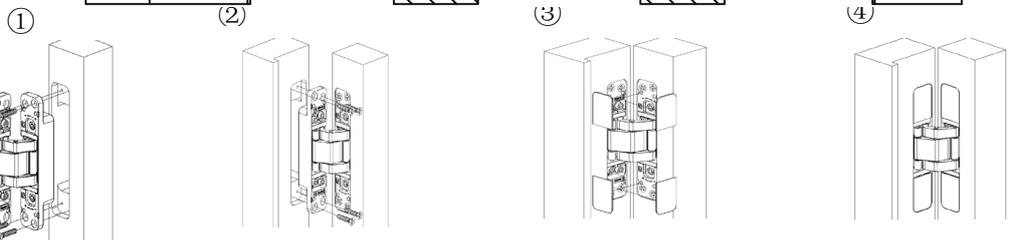

Phillips  
 door frame  
 ce should

4. Repeatedly operate the door leaf to open and close many times, check that everything is in order for the customer to use.
5. Pay attention the hinge daily maintenance, keep it clean, meanwhile can be applied with the small amount of grease (oil).

3

## Installation and adjustment function:

**Left and right adjustment:** Use Allen key to match A/A'. Clockwise adjust will increase the door gap, counterclockwise adjust will decrease the door. (Note: adjustment must be Synchronized!)

**Front and rear adjustment:** Loosen the B/B' screw counterclockwise to adjust it and then drop lock;

**Up and down adjustment:** Loosen the C/C' Screw counterclockwise to adjust it and then drop lock.